




## China Abec 7 Bearings Supplier

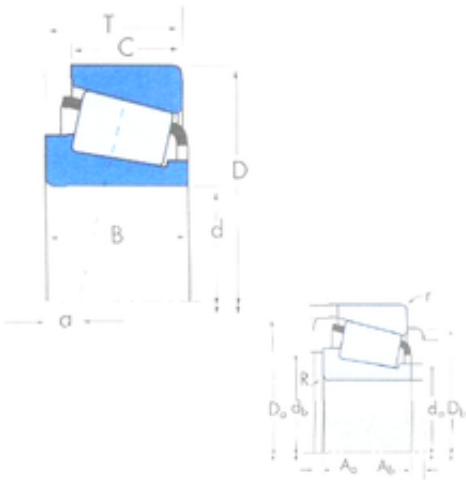

Agriculture machinery Timken tapered roller bearings L217849/L217810 3984/3920 3984/3925 roller bearings for Colombia

Bearing No. L217849/L217810

L217849/L217810 Bearing 2D drawings and 3D CAD models

|                               |                        |
|-------------------------------|------------------------|
| Size                          | 88.9x123.825x20.638 mm |
| Bore Diameter                 | 88,9 mm                |
| Outer Diameter                | 123,825 mm             |
| Width                         | 20,638 mm              |
| d                             | 88,9 mm                |
| D                             | 123,825 mm             |
| T                             | 20,638 mm              |
| B                             | 20,638 mm              |
| C                             | 16,67 mm               |
| R                             | 1,5 mm                 |
| r                             | 1,5 mm                 |
| a                             | 0 mm                   |
| Da                            | 119 mm                 |
| db                            | 97 mm                  |
| da                            | 94 mm                  |
| Db                            | 116 mm                 |
| Aa                            | 0,5 mm                 |
| Ab                            | 2,1 mm                 |
| Weight                        | 0,75 Kg                |
| Basic static load rating (C0) | 156 kN                 |
| Factor (G1)                   | 111,3                  |
| Factor (G2)                   | 74,8                   |
| Factor (Cg)                   | 0,0317                 |
| Factor (K)                    | 1,77                   |
| Basic dynamic load rating     | 22,2                   |



## China Abec 7 Bearings Supplier

|                                     |         |
|-------------------------------------|---------|
| (C90)                               |         |
| Basic dynamic load rating<br>(Ca90) | 12,6    |
| Basic dynamic load rating<br>(C1)   | 85,8 kN |
| Calculation factor (e)              | 0,33    |